


Product Code: CLRCDP036

Luckinslive 433612861

Description: 13A 2 Gang Type A Passive RCD Switched Socket Outlet

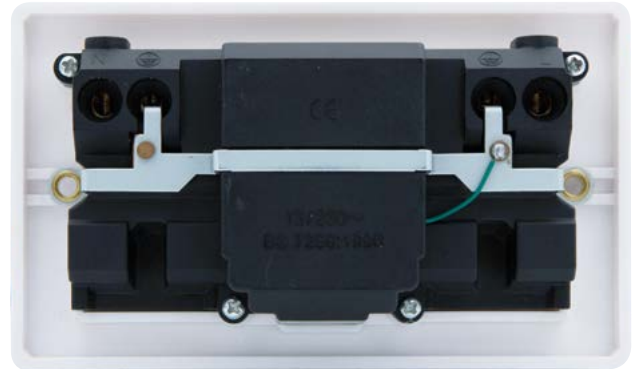

General Information

Dimensions (mm)	140 (W) x 80 (H) x 42 (D)		
Plate Fixing Centres - Horizontal (mm)	120.6		
Style	Metal Clad		
Colour	Grey		
Materials	Front Plate & Mounting Box:		Insert & Rocker Switch: Urea
	Electrophoretically Coated Steel		Terminals: Brass
	Rear Housing: Urea		Contacts: Silver "on-lay" Copper / Brass
	Terminal Screws: Steel & Yellow Passivated		Earth Strap: Mild Steel
Internal Busbars: Formed Pressed Brass			
PCB: Mixed Components			
Operating Voltage (AC)	250	Frequency (Hz)	50
Resistive Load Rating (A)	13		
Breaking Capacity (A)	250 (Earth Leakage)		
Through Fault Withstand (A)	1500		
Trip Speed	Less than 40ms at 150mA Residual Current		
Termination Type	Screw		
Terminal Size (mm)	Ø5	Terminal Torque Value (Nm)	2
Terminal Capacity - Solid (mm ²)	3 x 2.5 or 3 x 4		
Single Pole Switched	Yes		
Twin Earth Terminals	Yes		
Supplied Back Box Depth (mm)	40		
Back Box Knockouts - Total (mm)	7 x Ø20	Back Box Knockouts - Sides (mm)	1 x Ø20
Back Box Knockouts - Top (mm)	3 x Ø20	Back Box Knockouts - Rear (mm)	None
Back Box Knockouts - Bottom (mm)	2 x Ø20		
Back Box Earth Terminal Supplied	Yes		
Ingress Protection	IP20		
Operational Temperature (°C)	-5 to +40		
Warranty (Years)	20	Warranty - Electronics (Years)	2

Standards BS 1363-2, IEC 62640, BS 7288, SASO 2203, IEC 61000-6-1 & IEC 61000-6-3

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
 Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
 Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.



Catalogue



Range



DoC



Installation

