


Product Code: CT1300

Description: 250V 20A 3 Pole Switch Adaptor

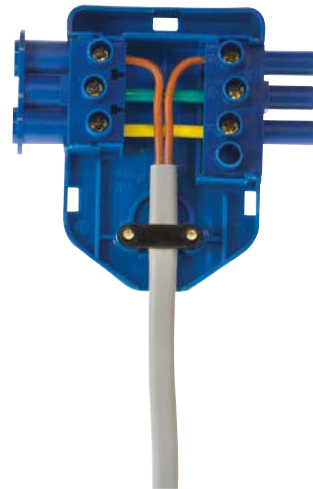

General Information

Dimensions (mm)	78 (W) x 85 (D) x 25 (H)	
Materials	Cover: Polycarbonate	Base & Terminal Housing: Nylon (PA66)
	Terminals: Silver Plated Brass	Terminal Screws: Steel and Yellow Passivated
Operating Voltage (AC)	250	Frequency (Hz) 50
Resistive Load Rating (A)	20	
Termination Type	Screw	
Terminal Size (mm)	Ø4.2	Terminal Torque Value (Nm) 0.8
Terminal Capacity - Solid (mm ²)	3 x 2.5	
Terminal Capacity - Flex (mm ²)	3 x 1.5	
Cable Restraint Supplied	Yes	
Ingress Protection	IP20	
Operational Temperature (°C)	-5 to +40	
Warranty (Years)	10	

Standards BS 8488, BS EN 61535, BS 5733

Additional Information For cleaning / polishing of products, use only a soft, dry, clean cloth. Ensure that the mains supply is isolated before commencing installation. Always refer to the circuit diagram supplied with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. Any dangerous compatibility between different manufactures installation coupler systems is not automatically prevented by compliance with IEC 61535.

Pre-wired Links 2.50mm² (Earth & Neutral)