

GUANGDONG LIGHTS QUALITY SUPERVISION TESTING STATION

PHOTOMETRIC RESULTS

DP-630M-Emergency mode

Number:	DP-630M	Diameter:	200mm
Report:		Length:	mm
Test No.:		Width:	mm
Lamp Type:	8W	Height:	mm
Lamp flux:	0 lm	Power:	0.0W
Test date:	2009-11-27	Operator:	wang

Luminaire Parameters

Voltage	: 0.0V	Client	: dppul electronic co.,ltd
Current	: 0.0A	Manufacturer:	dppul electronic co.,ltd
Power	: 0.0W	Weight	: Kg
Power Factor:	0.0		
Test Equipment:	GMS2000 GONIOPHOTOMETER		

Photometric Parameters

Luminaire Flux : 109.44 lm
 Luminaire Efficiency : Data imperfect...!
 Effective Flux : 108.42 lm
 Lightbeam Efficiency : Data imperfect...!
 Center Intensity : 23.048cd
 Max Intensity : 23.846cd
 Angle of Max Intensity : G:1 C:-45
 Half peak side angle : C0: 113.87Deg C90: 203.67Deg
 Tenth peak side angle : C0: 141.05Deg C90: 218.28Deg

GUANGDONG LIGHTS QUALITY SUPERVISION TESTING STATION

Special Intensity Data [Unit:cd] DP-630M-Emergency mode

C/G	-180	-179	-178	-177	-176	-175	-174	-173	-172	-171
-180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-135	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-45	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C/G	-170	-169	-168	-167	-166	-165	-164	-163	-162	-161
-180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-135	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-45	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C/G	-160	-159	-158	-157	-156	-155	-154	-153	-152	-151
-180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-135	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-45	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C/G	-150	-149	-148	-147	-146	-145	-144	-143	-142	-141
-180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-135	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-45	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

GUANGDONG LIGHTS QUALITY SUPERVISION TESTING STATION

Special Intensity Data [Unit:cd] DP-630M-Emergency mode

C/G	-140	-139	-138	-137	-136	-135	-134	-133	-132	-131
-180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-135	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-45	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90	0.0	0.0	0.0	0.0	0.0	0.3	0.3	0.0	0.0	0.0
135	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C/G	-130	-129	-128	-127	-126	-125	-124	-123	-122	-121
-180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-135	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-90	0.0	0.0	0.0	0.0	0.3	0.3	0.0	0.0	0.0	0.0
-45	0.0	0.0	0.0	0.0	0.0	0.3	0.0	0.0	0.3	0.0
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90	0.0	0.0	0.3	0.3	0.0	0.0	0.3	0.0	0.0	0.0
135	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C/G	-120	-119	-118	-117	-116	-115	-114	-113	-112	-111
-180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-135	0.3	0.3	0.0	0.3	0.0	0.0	0.0	0.0	0.3	0.0
-90	0.0	0.0	0.0	0.3	0.3	0.3	0.0	0.3	0.6	0.9
-45	0.0	0.3	0.0	0.0	0.3	0.0	0.3	0.3	0.3	0.0
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45	0.0	0.0	0.0	0.0	0.3	0.3	0.0	0.0	0.3	0.3
90	0.0	0.0	0.0	0.0	0.3	0.3	0.3	0.0	0.6	0.9
135	0.0	0.0	0.0	0.0	0.3	0.0	0.3	0.0	0.0	0.6
180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C/G	-110	-109	-108	-107	-106	-105	-104	-103	-102	-101
-180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-135	0.3	0.6	0.3	0.3	0.6	0.9	1.4	1.7	2.3	3.2
-90	0.9	1.1	2.0	2.9	3.4	4.6	6.9	9.5	11.5	12.6
-45	0.3	0.3	0.6	0.6	0.9	1.1	1.7	2.6	3.2	3.7
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45	0.3	0.6	0.6	0.6	0.9	1.4	2.0	2.3	2.9	3.2
90	1.4	1.7	2.0	3.4	4.3	5.2	6.3	6.9	7.8	10.9
135	0.3	0.6	0.6	0.3	0.6	0.9	1.4	1.7	2.3	2.9
180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

GUANGDONG LIGHTS QUALITY SUPERVISION TESTING STATION

Special Intensity Data [Unit:cd] DP-630M-Emergency mode

C/G	-100	-99	-98	-97	-96	-95	-94	-93	-92	-91
-180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-135	3.4	4.0	4.9	5.5	6.6	8.0	8.9	10.3	10.1	10.3
-90	13.8	14.4	14.9	15.5	15.8	16.4	17.0	17.0	16.7	16.4
-45	4.3	5.2	6.0	5.7	6.6	8.0	7.8	10.1	10.1	10.6
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45	3.7	4.6	5.2	6.0	5.7	5.7	5.7	5.5	6.6	6.0
90	11.2	12.1	12.9	14.1	14.4	14.7	14.9	14.9	14.7	14.9
135	3.2	3.7	4.0	4.9	5.5	6.6	6.3	5.2	6.0	5.7
180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C/G	-90	-89	-88	-87	-86	-85	-84	-83	-82	-81
-180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-135	10.6	10.9	10.1	10.3	10.3	10.1	10.3	10.9	11.5	11.5
-90	16.1	15.8	15.8	15.8	16.1	16.4	17.0	17.0	17.0	17.2
-45	11.5	11.5	10.9	10.3	11.2	11.2	10.9	10.9	11.5	11.8
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45	6.0	6.0	6.0	6.6	6.9	7.8	9.2	10.3	11.2	11.8
90	14.7	14.9	14.9	14.9	14.9	14.9	15.5	16.1	16.7	17.2
135	6.0	5.7	6.0	6.3	6.3	6.6	7.5	8.9	10.6	11.2
180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C/G	-80	-79	-78	-77	-76	-75	-74	-73	-72	-71
-180	0.0	0.0	0.0	0.0	0.3	0.6	0.3	0.6	1.1	1.1
-135	12.6	12.6	13.8	13.5	13.8	14.1	13.8	13.2	13.5	13.5
-90	17.8	18.1	18.4	19.0	18.7	19.0	19.0	19.2	19.5	19.2
-45	13.2	13.2	13.8	13.8	13.8	13.8	13.8	13.5	13.5	13.5
0	0.0	0.0	0.3	0.3	0.6	0.6	0.9	1.4	1.7	2.0
45	12.6	12.9	13.2	13.5	14.1	13.5	13.5	13.5	13.2	13.2
90	17.2	17.5	17.8	17.8	18.4	18.4	18.7	18.7	18.7	18.7
135	11.5	12.1	12.6	12.9	13.2	13.5	13.2	13.2	13.2	12.9
180	0.0	0.0	0.0	0.0	0.3	0.6	0.3	0.6	1.1	1.1

C/G	-70	-69	-68	-67	-66	-65	-64	-63	-62	-61
-180	1.1	2.0	2.3	2.9	3.4	4.0	4.6	5.5	6.3	6.3
-135	13.8	13.5	14.1	13.8	14.1	14.1	14.4	14.1	14.7	14.9
-90	19.5	19.0	18.7	18.4	18.7	18.4	19.0	18.7	19.0	18.7
-45	14.1	14.4	14.4	14.1	14.4	14.4	14.7	14.7	14.9	15.2
0	2.3	2.6	2.9	3.4	3.7	4.6	5.2	6.0	6.3	6.3
45	13.2	13.2	13.5	14.1	14.1	14.1	14.4	14.1	14.4	14.4
90	18.4	18.4	18.1	17.8	17.8	17.8	17.8	17.8	17.8	18.4
135	13.2	13.5	14.1	14.1	13.8	13.8	13.8	14.1	14.1	14.4
180	1.1	2.0	2.3	2.9	3.4	4.0	4.6	5.5	6.3	6.3

GUANGDONG LIGHTS QUALITY SUPERVISION TESTING STATION

Special Intensity Data [Unit:cd] DP-630M-Emergency mode

CAG	-60	-59	-58	-57	-56	-55	-54	-53	-52	-51
-180	6.3	6.6	8.6	10.6	11.8	12.4	12.4	13.2	13.5	14.1
-135	15.2	15.2	15.2	15.8	15.8	15.8	16.4	16.7	17.2	17.2
-90	18.7	18.7	18.7	19.0	19.0	19.0	19.5	19.5	19.5	19.8
-45	15.5	16.1	15.8	15.8	16.4	17.0	17.0	17.0	17.2	17.5
0	7.2	8.6	10.3	10.9	10.9	11.5	12.9	13.2	13.5	14.1
45	14.9	15.2	15.2	15.5	15.5	16.1	16.4	16.7	16.7	16.7
90	18.4	18.4	18.4	18.4	18.4	18.7	18.7	19.0	19.0	19.2
135	14.4	14.1	14.7	14.9	15.5	15.5	16.1	16.1	16.1	16.4
180	6.3	6.6	8.6	10.6	11.8	12.4	12.4	13.2	13.5	14.1

CAG	-50	-49	-48	-47	-46	-45	-44	-43	-42	-41
-180	14.1	14.1	14.4	14.9	14.9	15.2	15.5	16.1	16.1	16.4
-135	17.8	18.1	18.7	18.7	18.7	18.7	19.0	19.2	19.8	19.5
-90	20.1	20.1	20.1	20.4	21.0	21.3	21.8	21.5	21.8	21.5
-45	18.1	18.1	18.4	19.0	19.0	19.2	19.5	19.8	19.8	19.8
0	14.1	14.4	14.7	14.9	15.2	15.8	15.8	16.4	16.7	17.0
45	17.0	17.5	17.8	18.4	18.4	18.7	19.0	19.0	19.2	19.8
90	19.5	19.5	19.2	19.8	19.8	20.1	20.4	21.0	21.3	21.3
135	17.0	17.0	17.5	17.5	18.1	18.4	18.7	18.7	19.0	19.2
180	14.1	14.1	14.4	14.9	14.9	15.2	15.5	16.1	16.1	16.4

CAG	-40	-39	-38	-37	-36	-35	-34	-33	-32	-31
-180	16.7	17.2	17.2	17.5	17.8	18.4	19.0	19.0	18.7	19.0
-135	19.8	20.1	20.1	20.4	21.0	21.3	21.0	21.0	21.0	21.3
-90	21.5	21.8	21.8	22.1	22.7	22.4	22.7	22.7	22.4	22.4
-45	19.8	20.1	20.4	21.0	21.0	21.0	21.0	21.3	21.8	21.5
0	17.0	17.2	17.8	17.8	18.1	19.0	19.0	19.2	19.5	19.5
45	19.5	19.8	19.8	20.1	20.4	20.7	21.3	21.0	20.7	21.3
90	21.8	21.5	21.8	21.8	22.1	22.4	22.1	22.4	22.4	22.4
135	19.5	19.5	19.8	19.5	20.1	20.1	20.4	20.7	21.0	21.0
180	16.7	17.2	17.2	17.5	17.8	18.4	19.0	19.0	18.7	19.0

CAG	-30	-29	-28	-27	-26	-25	-24	-23	-22	-21
-180	19.2	19.8	19.8	19.8	20.1	20.7	20.7	20.7	21.3	21.3
-135	21.5	21.5	21.5	22.1	21.8	21.8	21.5	22.1	22.1	22.7
-90	23.0	23.0	22.7	23.0	23.0	22.7	22.4	22.7	22.4	22.7
-45	21.3	21.8	21.5	21.8	22.1	22.1	21.8	21.8	22.4	22.4
0	19.5	20.1	20.1	20.1	20.4	21.0	21.3	21.3	21.5	22.1
45	21.5	21.8	21.8	21.8	21.5	21.3	21.8	21.8	22.1	22.4
90	22.7	22.7	22.7	22.4	22.4	22.7	22.7	22.7	22.7	23.0
135	21.0	21.3	21.5	21.5	21.5	21.5	21.3	21.5	22.1	22.4
180	19.2	19.8	19.8	19.8	20.1	20.7	20.7	20.7	21.3	21.3

GUANGDONG LIGHTS QUALITY SUPERVISION TESTING STATION

Special Intensity Data [Unit:cd] DP-630M-Emergency mode

C/G	-20	-19	-18	-17	-16	-15	-14	-13	-12	-11
-180	22.1	22.1	21.8	22.1	22.4	22.4	22.4	22.4	22.4	22.4
-135	22.1	22.1	22.7	22.7	23.0	22.7	22.7	22.7	22.7	22.7
-90	23.0	22.4	23.0	23.0	23.3	23.0	23.0	23.3	23.3	23.6
-45	22.4	22.4	22.4	22.4	22.7	22.4	22.4	22.4	22.4	22.7
0	22.1	22.1	22.1	22.7	22.7	22.4	22.4	22.4	22.4	22.7
45	22.4	22.4	22.4	22.4	22.7	22.4	22.4	22.4	22.4	22.4
90	23.0	22.7	22.7	23.0	22.7	22.7	22.7	23.0	23.0	23.0
135	22.1	22.7	22.1	23.0	22.4	22.4	22.4	22.4	22.4	22.4
180	22.1	22.1	21.8	22.1	22.4	22.4	22.4	22.4	22.4	22.4

C/G	-10	-9	-8	-7	-6	-5	-4	-3	-2	-1
-180	22.4	22.4	22.7	23.0	23.0	23.0	22.7	22.7	22.7	23.0
-135	22.7	22.7	23.0	23.0	23.0	23.0	23.0	23.3	23.6	23.0
-90	23.3	23.3	23.3	23.3	23.3	23.0	23.3	23.3	23.6	23.6
-45	23.0	23.0	23.0	23.0	22.7	23.3	23.3	23.3	23.6	23.3
0	22.7	22.7	23.3	23.3	23.3	23.3	23.6	23.3	23.6	23.6
45	22.7	22.7	23.0	22.7	23.0	23.0	22.7	23.0	23.3	23.0
90	22.7	22.7	22.7	22.1	22.7	23.0	23.0	23.0	23.0	22.7
135	22.4	22.7	23.0	22.7	23.0	23.0	22.4	22.7	22.7	22.7
180	22.4	22.4	22.7	23.0	23.0	23.0	22.7	22.7	22.7	23.0

C/G	0	1	2	3	4	5	6	7	8	9
-180	23.0	23.6	23.3	23.0	23.0	23.0	23.0	22.7	23.0	23.0
-135	23.0	23.6	23.3	23.3	23.3	23.3	23.6	23.3	23.6	23.3
-90	23.0	23.3	23.6	23.6	23.0	23.6	23.3	23.6	23.6	23.3
-45	23.0	23.8	23.8	23.3	23.3	23.3	23.8	23.3	23.3	23.0
0	23.0	23.6	23.3	23.0	23.0	23.0	22.7	23.0	22.7	22.7
45	23.0	23.3	23.3	23.3	23.3	23.3	23.0	23.0	23.0	22.7
90	23.0	23.0	23.0	22.7	22.4	22.7	22.7	22.7	22.7	22.7
135	23.0	22.7	23.0	22.7	22.7	22.7	22.4	22.4	22.7	22.7
180	23.0	23.6	23.3	23.0	23.0	23.0	23.0	22.7	23.0	23.0

C/G	10	11	12	13	14	15	16	17	18	19
-180	22.7	22.7	22.7	22.4	22.4	22.4	22.4	22.4	22.4	22.1
-135	23.6	23.0	22.7	22.7	22.7	22.7	22.7	22.7	22.4	22.7
-90	23.0	23.0	23.0	23.0	23.3	23.6	23.6	23.3	23.3	23.6
-45	22.7	23.0	23.0	22.7	22.4	22.7	22.7	22.7	22.4	22.7
0	22.7	22.7	22.7	22.4	22.4	22.4	22.4	22.1	22.4	21.8
45	22.7	22.7	22.7	22.4	22.4	22.4	22.4	22.1	22.7	22.4
90	22.7	23.0	22.7	22.4	22.7	22.7	22.7	22.4	22.7	22.4
135	22.7	22.4	22.7	22.7	22.4	22.4	22.4	22.4	22.1	22.4
180	22.7	22.7	22.7	22.4	22.4	22.4	22.4	22.4	22.4	22.1

GUANGDONG LIGHTS QUALITY SUPERVISION TESTING STATION

Special Intensity Data [Unit:cd] DP-630M-Emergency mode

C/G	20	21	22	23	24	25	26	27	28	29
-180	22.1	21.8	21.5	21.5	21.3	21.5	21.3	21.5	21.0	20.4
-135	22.7	22.4	22.4	22.1	22.4	22.4	22.1	21.8	21.8	21.5
-90	23.3	23.3	23.0	23.0	22.7	22.7	22.7	23.0	22.7	22.7
-45	22.4	22.1	22.7	22.4	22.1	22.1	21.5	21.5	21.8	21.5
0	21.8	21.5	21.8	21.3	21.5	20.7	20.4	20.4	20.4	20.1
45	22.4	22.1	21.8	22.1	22.1	21.8	21.8	21.5	21.5	21.3
90	22.4	22.7	22.7	22.7	22.7	22.7	22.4	22.1	22.4	22.4
135	22.1	22.4	22.1	22.1	22.1	22.1	22.1	21.8	21.5	21.3
180	22.1	21.8	21.5	21.5	21.3	21.5	21.3	21.5	21.0	20.4

C/G	30	31	32	33	34	35	36	37	38	39
-180	21.0	20.4	20.1	19.5	19.2	19.5	18.7	18.7	18.4	18.7
-135	21.8	21.5	21.5	21.0	21.3	21.0	21.0	21.0	20.7	20.7
-90	22.7	22.7	22.7	22.7	22.4	22.1	22.7	22.1	22.4	21.8
-45	21.5	21.5	21.5	21.3	21.3	21.0	20.7	20.7	20.4	20.7
0	19.8	19.5	19.0	19.0	18.7	18.7	18.7	18.4	18.4	17.8
45	21.3	21.3	20.7	21.0	21.0	20.7	21.0	21.0	21.0	20.7
90	22.7	22.7	22.7	22.7	22.7	22.4	22.7	22.4	22.1	22.7
135	21.5	21.3	21.5	21.5	20.7	20.7	21.0	20.7	20.7	20.7
180	21.0	20.4	20.1	19.5	19.2	19.5	18.7	18.7	18.4	18.7

C/G	40	41	42	43	44	45	46	47	48	49
-180	18.1	17.8	17.2	17.0	17.0	16.4	16.4	15.8	15.5	15.5
-135	20.4	20.1	19.8	19.5	19.2	19.2	19.0	18.7	18.4	18.4
-90	21.5	21.5	21.3	21.5	21.0	20.7	20.7	20.4	20.7	20.4
-45	20.4	20.1	19.8	19.5	19.2	19.2	19.0	18.4	18.4	18.1
0	17.5	17.2	16.7	16.4	16.4	16.1	15.8	15.2	15.2	14.9
45	20.7	20.1	19.8	19.5	19.0	19.2	19.0	19.0	18.4	18.1
90	22.4	21.8	21.5	21.5	21.8	21.8	21.5	21.0	21.0	20.7
135	20.4	20.7	20.1	19.8	19.5	19.2	19.0	18.7	18.4	18.4
180	18.1	17.8	17.2	17.0	17.0	16.4	16.4	15.8	15.5	15.5

C/G	50	51	52	53	54	55	56	57	58	59
-180	15.2	14.7	14.4	13.8	13.5	13.8	13.2	12.9	12.6	12.1
-135	18.4	18.1	17.8	17.2	17.0	16.4	16.4	16.4	16.1	15.5
-90	20.4	19.5	19.2	19.5	19.2	19.2	19.0	19.0	18.7	18.4
-45	17.8	17.5	17.2	16.7	16.7	16.7	16.1	15.8	15.5	15.2
0	14.9	14.4	14.1	13.5	13.5	13.5	12.9	12.4	12.4	12.1
45	17.8	17.2	17.2	17.0	16.7	16.4	16.4	16.1	15.8	15.2
90	20.4	20.4	20.7	20.4	20.4	20.1	19.5	19.2	19.0	18.7
135	18.1	18.1	17.8	17.5	17.2	17.0	16.4	16.1	16.1	16.1
180	15.2	14.7	14.4	13.8	13.5	13.8	13.2	12.9	12.6	12.1

GUANGDONG LIGHTS QUALITY SUPERVISION TESTING STATION

Special Intensity Data [Unit:cd] DP-630M-Emergency mode

CAG	60	61	62	63	64	65	66	67	68	69
-180	11.8	11.5	10.3	8.3	6.3	5.5	5.2	5.2	4.9	4.0
-135	15.5	15.2	14.9	14.9	14.7	14.7	14.4	13.8	13.8	13.5
-90	18.4	18.1	18.1	18.1	17.8	18.1	18.1	17.8	17.8	17.5
-45	14.9	14.9	14.7	14.9	14.9	14.4	14.1	14.1	13.8	13.8
0	11.2	9.5	6.9	6.0	5.5	5.7	4.6	4.0	3.7	3.7
45	15.2	14.9	14.9	14.7	14.4	14.1	14.1	14.1	13.8	13.8
90	18.7	18.7	19.0	19.0	18.7	18.4	18.4	18.7	18.4	18.1
135	15.5	15.5	15.5	14.9	14.9	14.7	14.7	14.4	13.8	13.5
180	11.8	11.5	10.3	8.3	6.3	5.5	5.2	5.2	4.9	4.0

CAG	70	71	72	73	74	75	76	77	78	79
-180	3.4	3.2	2.3	2.0	1.4	1.4	1.1	0.9	0.6	0.3
-135	14.1	13.8	13.5	13.2	12.9	13.2	13.2	13.2	13.2	12.9
-90	17.8	18.7	18.4	18.7	18.7	18.7	18.7	18.1	17.8	17.8
-45	13.5	13.5	13.5	13.2	12.6	13.5	13.2	13.5	13.5	13.5
0	3.2	2.6	2.0	1.7	1.4	0.9	0.6	0.3	0.0	0.3
45	13.5	13.8	12.9	13.2	13.2	13.2	13.2	13.2	13.2	12.9
90	18.1	19.0	19.2	19.5	19.2	19.2	19.0	19.0	18.7	18.1
135	13.8	13.8	13.5	13.5	14.1	13.5	13.8	13.8	13.5	14.1
180	3.4	3.2	2.3	2.0	1.4	1.4	1.1	0.9	0.6	0.3

CAG	80	81	82	83	84	85	86	87	88	89
-180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-135	13.2	12.6	12.6	12.6	12.4	11.2	10.3	10.1	7.8	6.6
-90	17.5	17.8	17.5	17.0	16.4	16.1	15.2	15.2	15.5	14.9
-45	12.6	12.4	12.1	12.1	11.5	10.6	10.1	8.0	6.6	6.3
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45	13.2	12.9	12.4	12.4	11.8	11.8	11.2	10.3	10.3	9.8
90	18.1	18.1	17.8	17.2	16.7	16.4	16.1	16.1	16.1	15.8
135	13.8	13.5	13.2	12.6	12.6	12.1	11.8	12.1	12.1	11.5
180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

CAG	90	91	92	93	94	95	96	97	98	99
-180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-135	6.0	6.0	6.0	5.5	5.7	5.7	5.5	6.6	5.7	4.9
-90	14.9	14.9	14.9	14.7	14.9	14.9	14.7	14.9	14.7	13.8
-45	5.7	6.0	5.7	5.7	5.7	5.7	5.5	6.6	5.2	4.9
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45	9.5	9.8	8.0	6.9	6.6	6.9	6.9	6.3	5.7	5.5
90	15.8	15.5	16.1	16.1	16.4	17.0	16.7	16.4	15.8	15.5
135	11.2	10.9	10.6	10.6	10.3	10.1	10.1	8.9	8.0	6.0
180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

GUANGDONG LIGHTS QUALITY SUPERVISION TESTING STATION

Special Intensity Data [Unit:cd] DP-630M-Emergency mode

C/G	100	101	102	103	104	105	106	107	108	109
-180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-135	5.2	4.0	4.0	3.4	2.9	2.3	1.7	1.1	1.1	0.6
-90	13.5	13.5	12.9	12.4	11.2	9.8	6.6	5.5	4.9	3.7
-45	4.3	4.3	3.7	3.7	3.2	2.6	2.0	1.4	1.1	0.9
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45	6.0	4.0	3.4	2.9	2.6	1.7	1.4	1.1	0.9	0.9
90	14.9	14.4	13.5	13.5	12.4	11.5	9.5	5.7	4.3	3.7
135	5.2	4.6	4.3	3.7	3.4	2.3	1.7	1.4	0.9	0.9
180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C/G	110	111	112	113	114	115	116	117	118	119
-180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-135	0.6	0.3	0.3	0.0	0.0	0.0	0.0	0.0	0.3	0.0
-90	3.4	2.0	1.1	0.9	1.1	0.6	0.3	0.3	0.3	0.0
-45	0.9	0.9	0.9	0.6	0.3	0.0	0.0	0.0	0.0	0.3
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45	0.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	0.0
90	3.2	1.7	1.4	1.1	0.6	0.3	0.3	0.0	0.0	0.0
135	0.6	0.3	0.3	0.0	0.3	0.0	0.0	0.0	0.0	0.0
180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C/G	120	121	122	123	124	125	126	127	128	129
-180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-135	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-90	0.3	0.0	0.0	0.0	0.0	0.3	0.0	0.3	0.3	0.0
-45	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90	0.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C/G	130	131	132	133	134	135	136	137	138	139
-180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-135	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-45	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

GUANGDONG LIGHTS QUALITY SUPERVISION TESTING STATION

Special Intensity Data [Unit:cd] DP-630M-Emergency mode

C/G	140	141	142	143	144	145	146	147	148	149
-180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-135	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-45	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C/G	150	151	152	153	154	155	156	157	158	159
-180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-135	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-45	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C/G	160	161	162	163	164	165	166	167	168	169
-180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-135	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-45	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C/G	170	171	172	173	174	175	176	177	178	179
-180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-135	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-45	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0


GUANGDONG LIGHTS QUALITY SUPERVISION TESTING STATION

Special Intensity Data [Unit:cd] DP-630M-Emergency mode


C/G	180
-180	0.0
-135	0.0
-90	0.0
-45	0.0
0	0.0
45	0.0
90	0.0
135	0.0
180	0.0

DP-630M-Emergency mode


Luminous Intensity Distribution [Unit:cd]

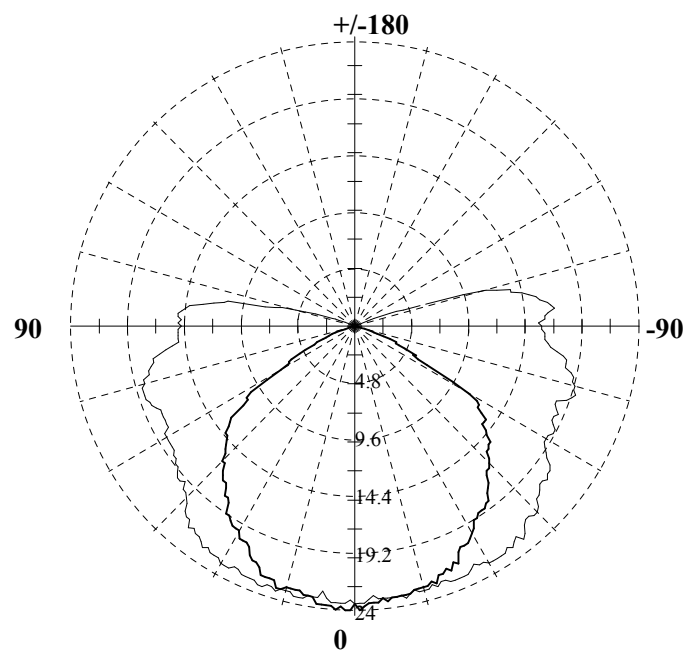

Polar Coordinates

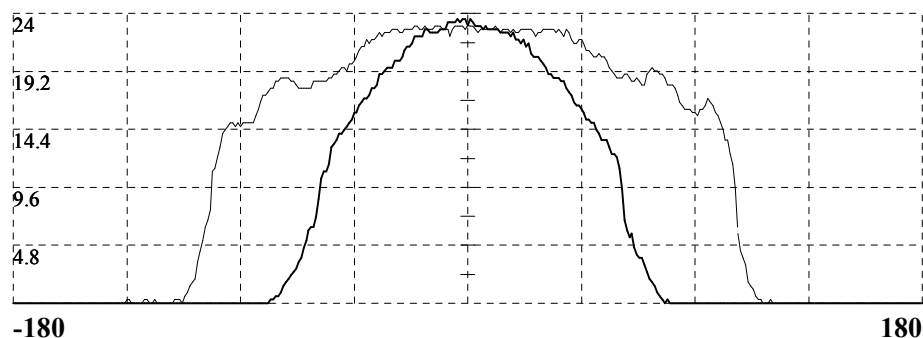

Right-angled Coordinates



Horizontal Angle Range: -180/180 Deg


Vertical Angle : 0 , 90 Deg

Max Intensity(C0Plane) : 23.56cd

Max Intensity(C90Plane) 23.05cd

GUANGDONG LIGHTS QUALITY SUPERVISION TESTING STATION

Plane iso-illuminance curve [Unit:lx] DP-630M-Emergency mode

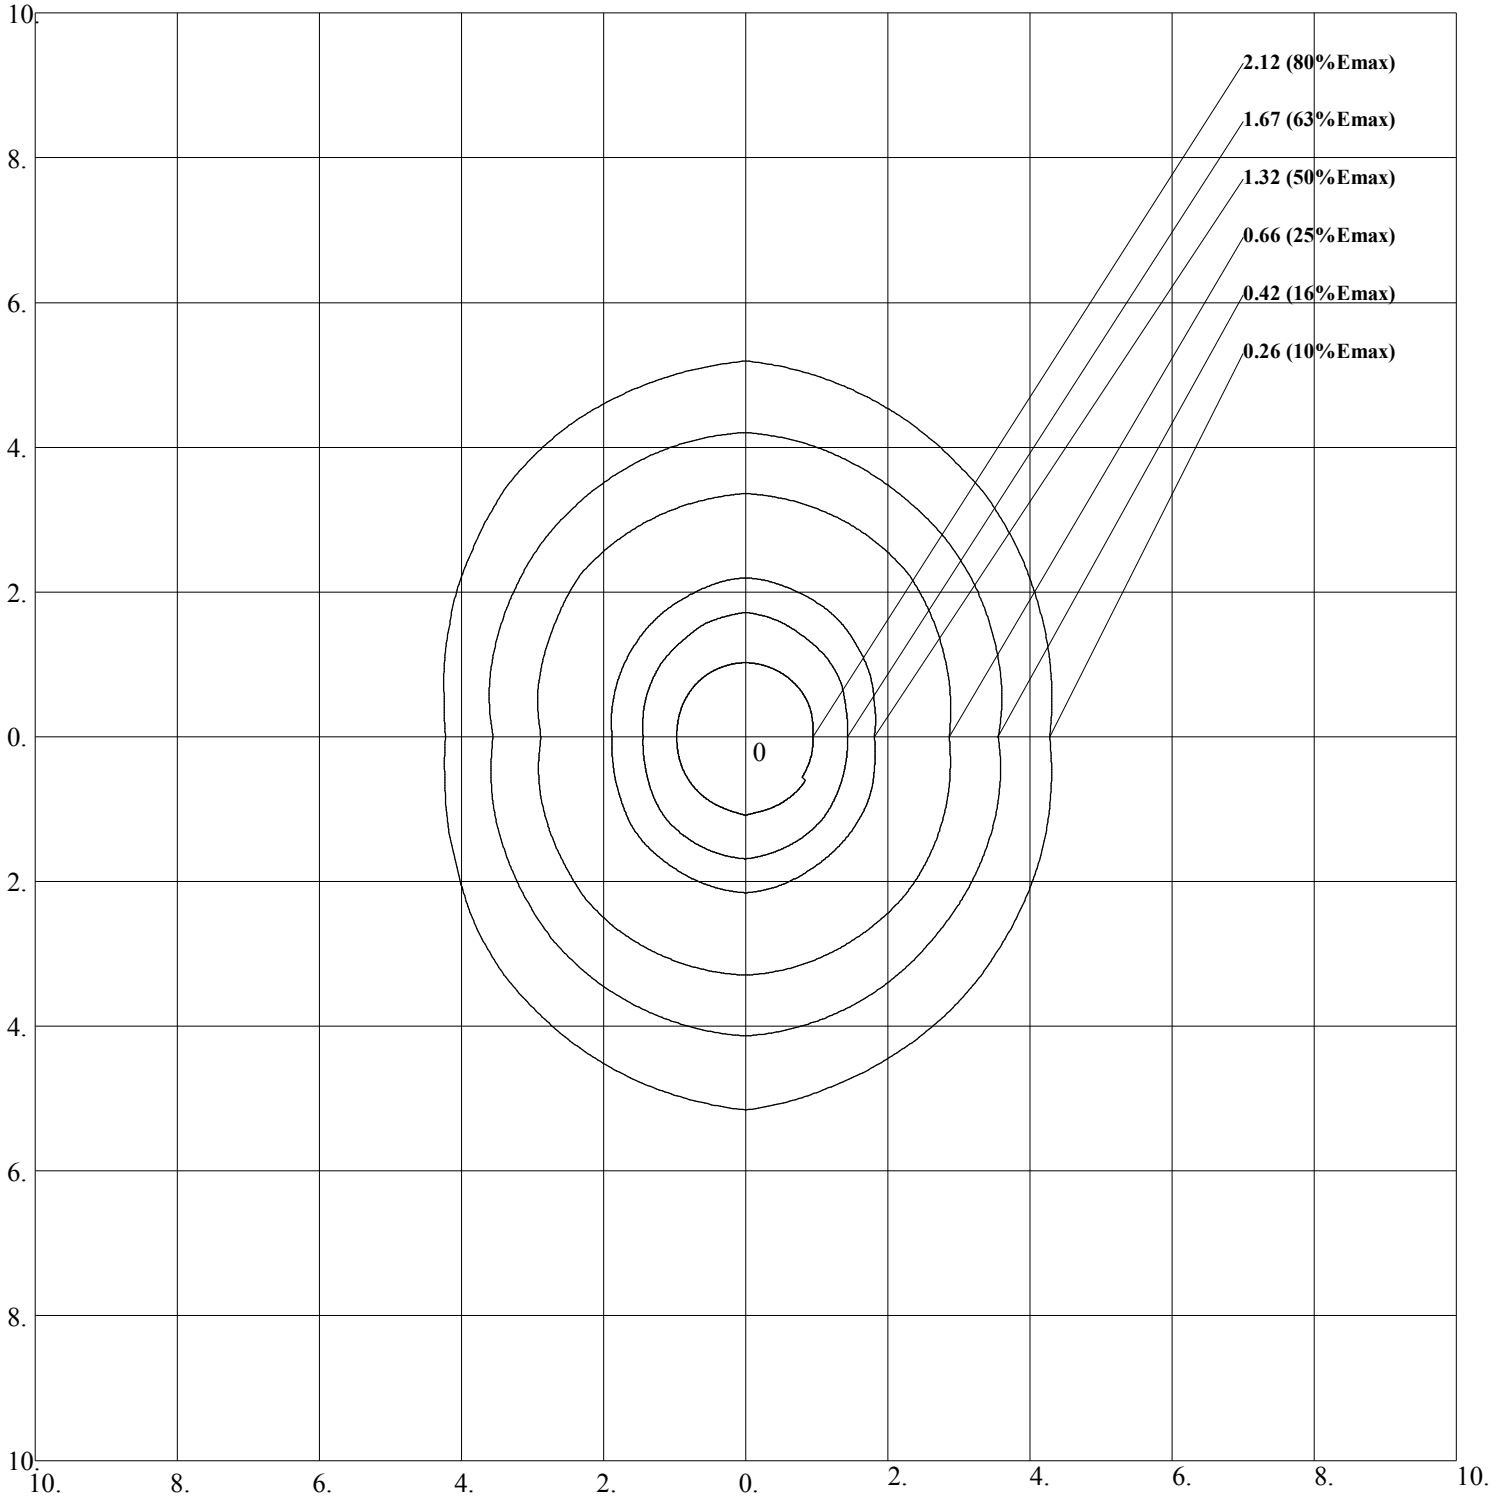

Units : lx
Height : 3 m
Max Illuminance: 2.65lx