


Technical Specification



Luckinslive 425139653 Product Code: CMA836PWGR Description: 13A 2 Gang Double Pole Switched Socket Outlet With Outboard Green Rockers



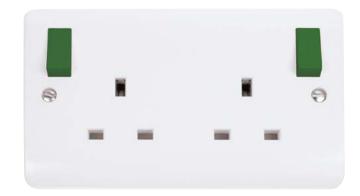

General Information

Plate Dimensions (mm) 146 (W) x 86 (H) x 9.5 (D)

Plate Fixing Centres - Horizontal (mm) 120.6

> Rounded Profile Style Colour Polar White Switch Finish

> > Materials Front Plate & Rocker Switch: Urea

Terminals: Brass Contacts: Silver "on-lay" Copper / Brass

Earth Strap: Mild Steel

Anti Microbial Certified Operating Voltage (AC) 250 Frequency (Hz)

Resistive Load Rating (A) 13 Termination Type Screw

Terminal Size (mm) Ø5

Terminal Capacity - Solid (mm²) 3 x 2.5 or 2 x 4 Double Pole Switch Yes

Twin Earth Terminals Yes Minimum Back Box Depth (mm) Ingress Protection IP20

Operational Temperature (°C) -5 to +40 Warranty (Years)

Standards BS 1363-2

Rear Housing: Urea

Terminal Screws: Steel & Yellow Passivated Internal Busbars: Formed Pressed Brass

Terminal Torque Value (Nm) 2

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases as well as anti-viral properties against enveloped and non-enveloped viruses.

All products have been independently tested with 99.9% of enveloped viruses and 92% of non-enveloped viruses killed off whilst achieving a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.

Scolmore House, Mariner, Lichfield Road Industrial Estate, Tamworth, Staffordshire, B79 7UL United Kingdom











Specification is subject to change without notice. Errors & Omissions excluded.